

SERIES 2100 CONTRACTOR LIFT

SUMNER

Sumner Manufacturing Co, Inc.

A Versatile, Inexpensive Contractor Lift

Series 2100 Features:

- Lifts 650 lb (300 kg)
- 12, 18 and 24 foot heights (3.9, 5.6 and 7.2 m)
- Lightweight
- All the features of the Series 2000 lift at a lower price!

Pulley Guards
Load cable cannot come off.



Reversible Forks
Using plunger pins, forks remove and reverse easily for added height or to get flush with a ceiling. No loose pieces!

Loading Bar
Great for overhead cranes

Roller Wheels
Helps to roll into trucks or vans

Inside-Mast Cable Feed
Cable feeds inside mast, removing exposed cable from near the operator's face.

Sumner-built Winch
Highly reliable, single-speed winch uses idler roller to feed cable evenly on the drum to avoid cable flats. Handles are removable when not in use.



10" Rough Terrain Wheels
Makes loading a truck or van hassle free.

Lockable 5" Casters
Hard tread urethane wheels with Delrin® bearings.

Fast Action Stabilizer Legs
Mounted on base top, stabilizer legs fold down with ease and lock in place. Optional on model 2112.



Fits through doorways!

MADE IN USA

Part No.	Description	Max Height		Lifting Capacity		Lift Weight		Shipping Weight	
		Feet	Meter	lb	kg	lb	kg	lb	kg
783650	2112 Contractor Lift	12' 11-3/8"	3.9	650	300.0	252	114.5	287	130.5
783651	2118 Contractor Lift	18' 4-3/8"	5.6	650	300.0	321	145.9	356	161.8
783652	2124 Contractor Lift	23' 9-3/8"	7.2	650	300.0	366	166.0	399	181.4

SERIES 2100 CONTRACTOR LIFT

Available
in optional
galvanized
finish!
(#776270)



One piece slide-lock mechanism releases with plunger pins to fold legs. Leg rollers allow lift to be wheeled around with legs in stored position.



Pipe Cradle (#783705)

- ▶ Great for duct pipe or other HVAC applications.
- ▶ Slides over standard forks.




Fork Extensions (#783691)

- ▶ Push-button operation
- ▶ Extend forks from 28" to 42" (71–106 cm)
- ▶ Longer forks decrease weight capacity to 200 lb (90 kg) (clearly displayed on the forks when extended).



Boom Carriage (#783642)

- ▶ Ideal for installing pipe or other lifting applications.
- ▶ Attaches with four plunger pins
- ▶ 40" (100 cm) reach
- ▶ Five (5) hooking options
- ▶ Load capacity decreases the farther boom is extended, from 650 to 200 lb (300 to 90 kg).

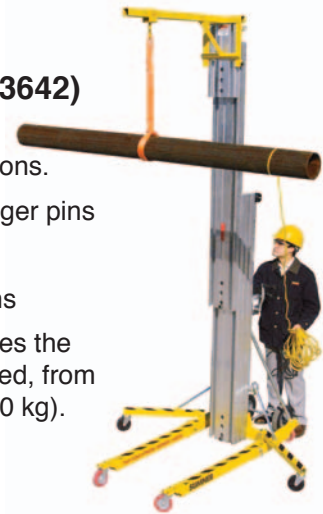

Two Speed Winch Handle Kit (Factory Installed #783765)

Offers a standard speed setting or a high speed setting. For field installation kit, use part # 783761.

Series 2100 Contractor Lift Dimensions	2112		2118		2124	
Height - stowed	7' 0"	2.13 m	7' 0"	2.13 m	7' 0"	2.13 m
Length - stowed	34.0"	0.86 m	34.0"	0.86 m	34.0"	0.86 m
Height - operating	7' 0"	2.13 m	7' 0"	2.13 m	7' 0"	2.13 m
Length - operating	5' 2"	1.57 m	6' 1"	1.84 m	6' 1"	1.84 m
Base width	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m
Width with stabilizer legs	6' 2"	1.88 m	6' 2"	1.88 m	6' 2"	1.88 m
Ground clearance	2.5"	6.4 cm	2.5"	6.4 cm	2.5"	6.4 cm
Load height (minimum)	6.0"	15.2 cm	6.0"	15.2 cm	6.0"	15.2 cm
Maximum height (forks down)	10' 11-5/8"	3.3 m	16' 4-5/8"	5.0 m	21' 9-5/8"	6.6 m
Maximum height (forks reversed)	12' 11-3/8"	3.9 m	18' 4-3/8"	5.6 m	23' 9-3/8"	7.2 m

SUMNER

Sumner Manufacturing Co, Inc.

www.sumner.com

DISTRIBUTED BY:

Sumner - U.S. 7514 Alabonson Road • Houston, TX 77088 • Ph: 281-999-6900 • Fax: 281-999-6966

Sumner - Canada 75 Saltsman Drive, Unit 5 • Cambridge, Ontario N3H 4R7 • Ph: 519-653-5300 • Fax: 519-653-5305

Sumner - Netherlands Midden Engweg 21 • NL-3882TS Putten • The Netherlands • Ph: +31 (0) 85 489 0284 • europeansales@sumner.com

Sumner - U.K. Unit 3 Kempton Road • Keytec 7 Business Park • Pershore, Worcestershire WR10 2TA • Ph: (44) 01386 556278 • Fax: (44) 01386 556776