



Electric scissor lift

JCPT0807DC

Electric scissor lift JCPT0807DC

STANDARD EQUIPMENT

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tires
- 2 WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Overload sensor with alarm
- Tilt sensor with alarm
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon

SPECIFICATIONS



Platform capacity (SWL) **230 kg**
 Platform capacity (SWL) on extension **113 kg**
 Maximum workers number **2**



Working height **7,8 m**
 Platform floor height **5,8 m**



Overall length **1,86 m**
 Overall width **0,76 m**
 Overall height (Rails up) **2,18 m**
 Overall height (Rails down) **1,84 m**
 Platform size **1,67 x 0,74 m**
 Platform extension size **0,9 m**
 Ground clearance (Stowed) **0,09 m**
 Ground clearance (Raised) **0,019 m**
 Wheelbase **1,38 m**
 Turning radius (inside) **0 m**
 Turning radius (outside) **1,64 m**



Drive motors **24 V / 0,5 kw**
 Lifting motor **24 V / 2 kw**



Travel speed (Stowed) **5 km / h**
 Travel speed (Raised) **0,8 km / h**
 Up / Down speed **27 / 22 sec**



Batteries **4 x 6 V / 185 Ah**
 Integrated charger **24 V / 25 A**



Gradeability **25 %**
 Maximum working slope **2 - 3 °**





Tires **Φ 305 x 100 mm**



Weight **1415 kg**

OPTIONS

- Platform work lights
- Airline to the platform
- AC power to the platform

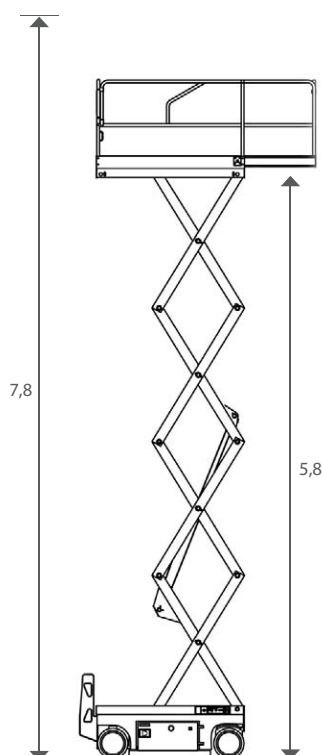

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives